



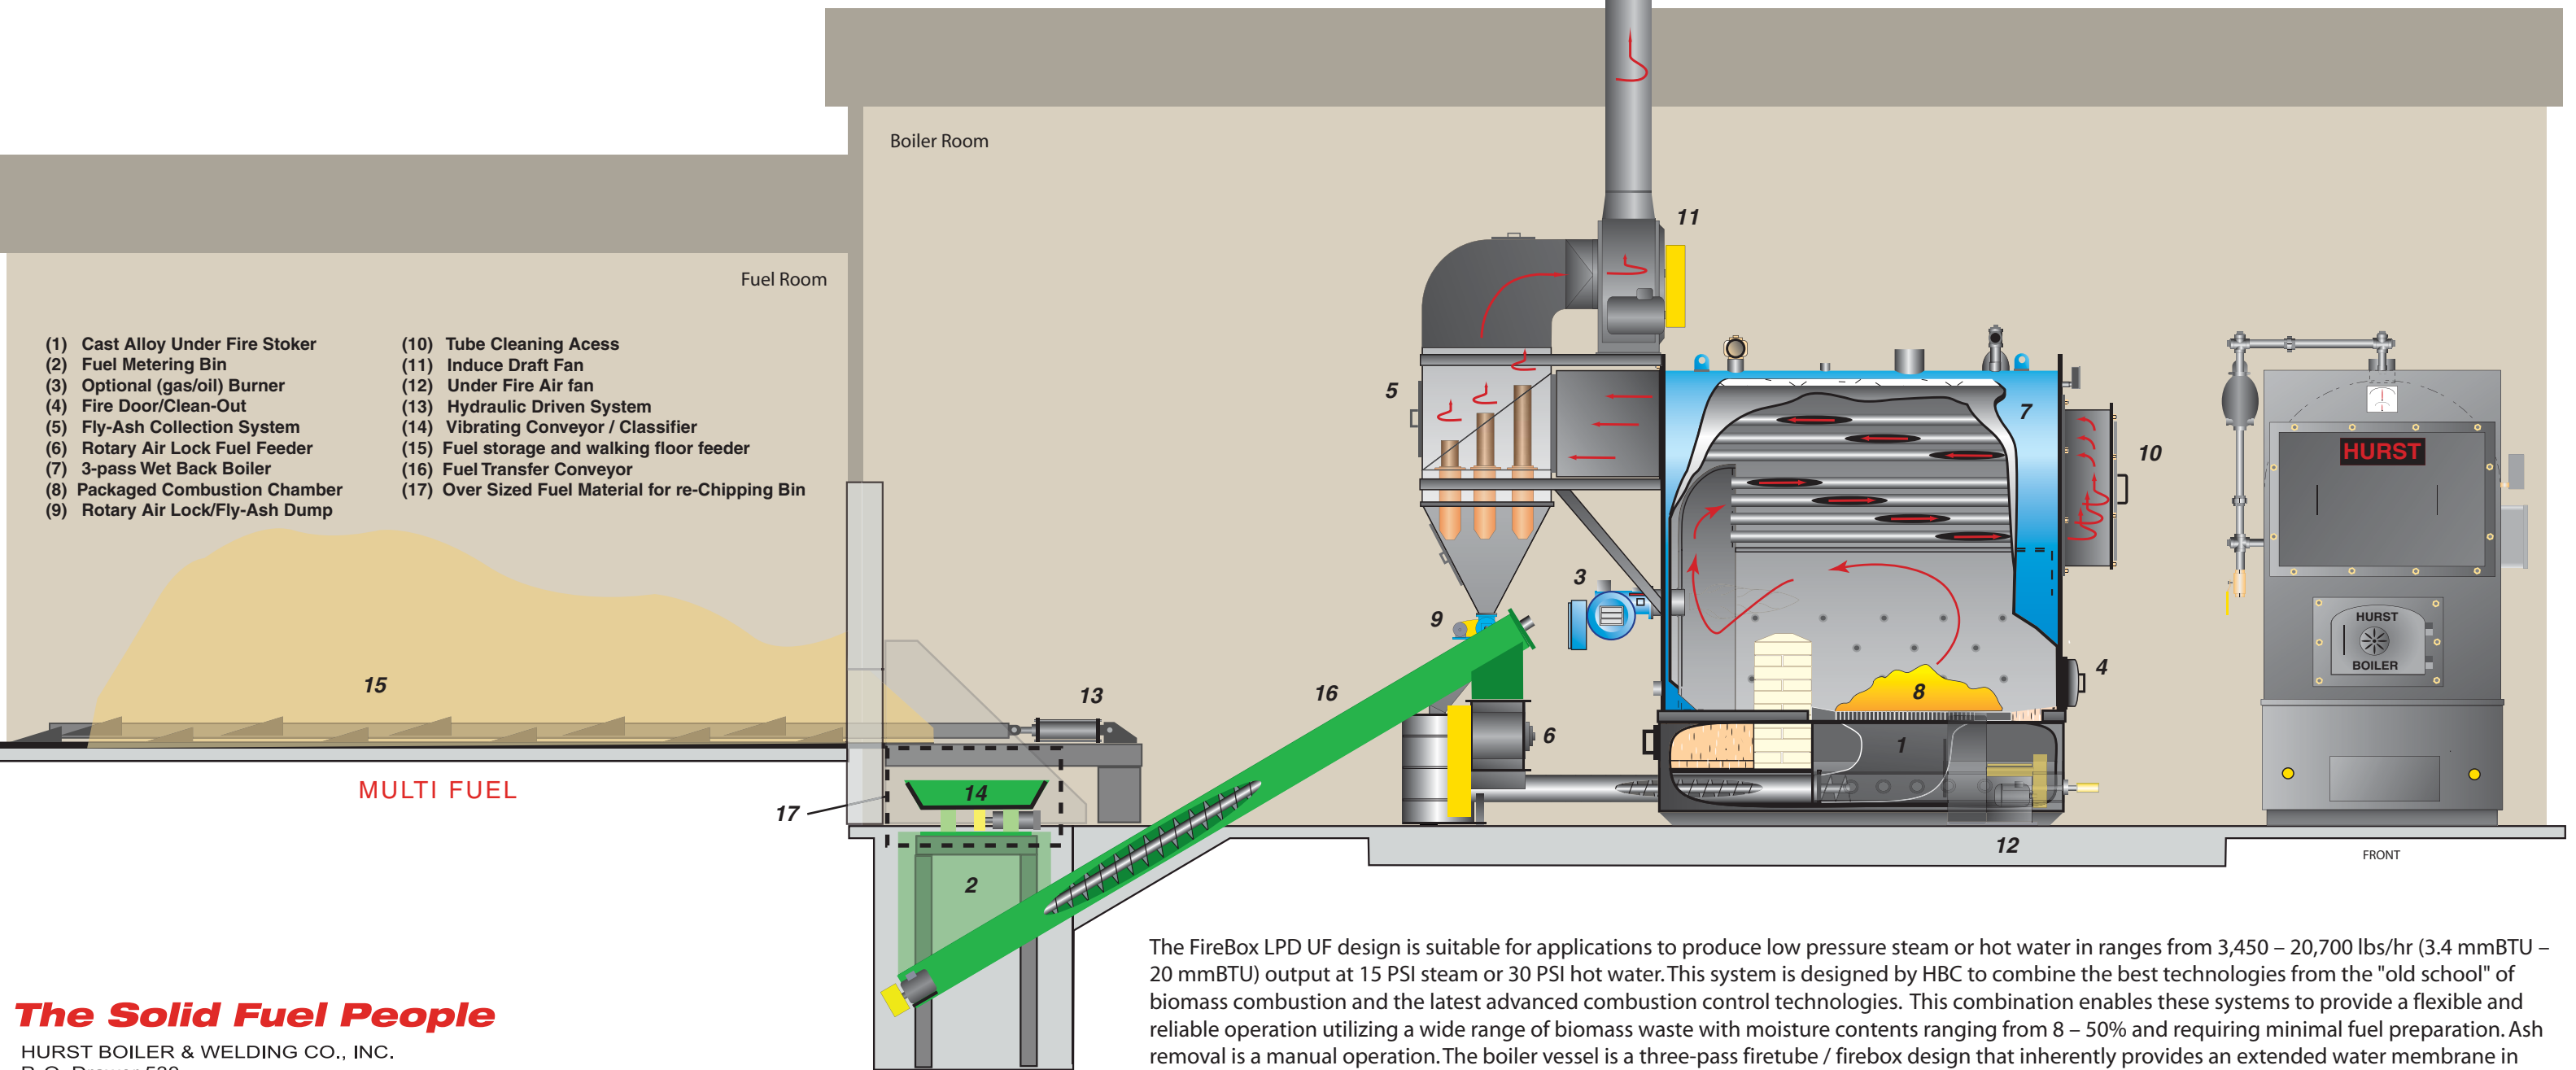

Solid Fuel Solutions

Under Feed Stoker

Combustion System



- (1) Cast Alloy Under Fire Stoker
- (2) Fuel Metering Bin
- (3) Optional (gas/oil) Burner
- (4) Fire Door/Clean-Out
- (5) Fly-Ash Collection System
- (6) Rotary Air Lock Fuel Feeder
- (7) 3-pass Wet Back Boiler
- (8) Packaged Combustion Chamber
- (9) Rotary Air Lock/Fly-Ash Dump
- (10) Tube Cleaning Access
- (11) Induce Draft Fan
- (12) Under Fire Air fan
- (13) Hydraulic Driven System
- (14) Vibrating Conveyor / Classifier
- (15) Fuel storage and walking floor feeder
- (16) Fuel Transfer Conveyor
- (17) Over Sized Fuel Material for re-Chipping Bin

The FireBox LPD UF design is suitable for applications to produce low pressure steam or hot water in ranges from 3,450 – 20,700 lbs/hr (3.4 mmBTU – 20 mmBTU) output at 15 PSI steam or 30 PSI hot water. This system is designed by HBC to combine the best technologies from the "old school" of biomass combustion and the latest advanced combustion control technologies. This combination enables these systems to provide a flexible and reliable operation utilizing a wide range of biomass waste with moisture contents ranging from 8 – 50% and requiring minimal fuel preparation. Ash removal is a manual operation. The boiler vessel is a three-pass firetube / firebox design that inherently provides an extended water membrane in the furnace area greatly reducing the amount of refractory required.

The Solid Fuel People

HURST BOILER & WELDING CO., INC.
P. O. Drawer 530
21971 Highway 319 N.
Coolidge, Georgia 31738
Toll Free: 1-877-994-8778
Tel: (229) 346-3545
Fax: (229) 346-3874
Email: info@hurstboiler.com

CAT# B-11

HURST FIREBOX LPD UF

Under Fire Feed System

Modular Packaged